


KIT-BZ35-XKE (CS-BZ35XKE + CU-BZ35XKE)



Discover the latest generation of air conditioning system

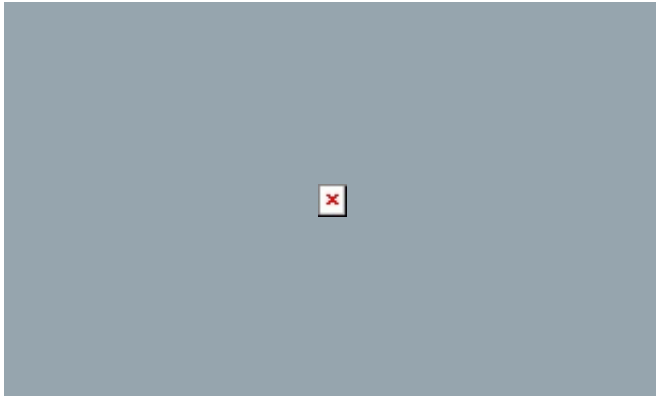

Panasonic Comfort Cloud App. Convenient centralised control

[FIND OUT MORE](#)



New Voice Control

Control without boundaries and get hands-free help to fully access the features of your air conditioners.

[FIND OUT MORE](#)

BZ super-compact · R32		
		3.40 kW
Kit		KIT-BZ35-XKE
Cooling capacity (Nominal)	kW	3,40
Cooling capacity (Min)	kW	0,85
Cooling capacity (Max)	kW	3,90
EER (Nominal) (1)	W/W	3,18
EER (Min) (1)	W/W	3,54
EER (Max) (1)	W/W	3,05
SEER (2)		6,10 A++
Pdesign (cooling)	kW	3,40
Input power cooling (Nominal)	kW	1,07
Input power cooling (Min)	kW	0,24
Input power cooling (Max)	kW	1,28
Annual energy consumption cooling (3)	kWh/a	195
Heating capacity (Nominal)	kW	3,84
Heating capacity (Min)	kW	0,80
Heating capacity (Max)	kW	4,40
Heating capacity at -7°C	kW	2,60
COP (Nominal) (1)	W/W	3,69
COP (Min) (1)	W/W	4,10
COP (Max) (1)	W/W	3,41
SCOP (2)		4,20 A+
Pdesign at -10°C	kW	2,40
Input power heating (Nominal)	kW	1,04
Input power heating (Min)	kW	0,20
Input power heating (Max)	kW	1,29
Annual energy consumption heating (3)	kWh/a	800
Indoor unit		CS-BZ35XKE
Indoor power source	V	230
Indoor recommended fuse	A	16
Indoor connection indoor / outdoor	mm ²	4 x 1,5
Indoor air flow (Cool)	m ³ /min	10,8
Indoor air flow (Heat)	m ³ /min	11,3
Moisture removal volume	L/h	2,0
Indoor sound pressure (Cool -Hi) (4)	dB(A)	38
Indoor sound pressure (Cool -Hi) (4)	dB(A)	38
Indoor sound pressure (Cool -Lo) (4)	dB(A)	30
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	20
Indoor sound pressure (Heat -Hi) (4)	dB(A)	38
Indoor sound pressure (Heat -Lo) (4)	dB(A)	33
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	25
Indoor dimension (Height)	mm	290
Indoor dimension (Width)	mm	779
Indoor dimension (Depth)	mm	209
Indoor net weight	kg	8
Outdoor unit		CU-BZ35XKE
Outdoor air flow (Cool)	m ³ /min	31,1
Outdoor air flow (Heat)	m ³ /min	31,1
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48

BZ super-compact · R32		3.40 kW
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	50
Outdoor dimension (Height) (5)	mm	542
Outdoor dimension (Width) (5)	mm	780
Outdoor dimension (Depth) (5)	mm	289
Outdoor net weight	kg	25
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 15
Elevation difference (in/out) (6)	m	15
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	10
Refrigerant (R32) / CO2 Eq.	kg / T	0,67 / 0,45
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Max)	°C	+43
Operating range (Heat - Min)	°C	-15
Operating range (Heat - Max)	°C	+24

Complementary products

