


KIT-BZ25-XKE (CS-BZ25XKE + CU-BZ25XKE)



Discover the latest generation of air conditioning system

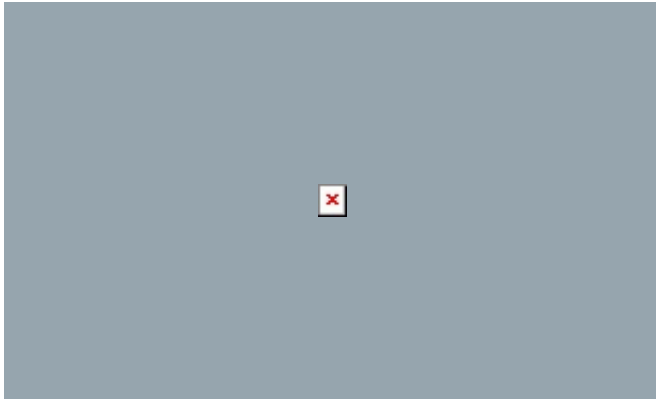

Panasonic Comfort Cloud App. Convenient centralised control

[FIND OUT MORE](#)



New Voice Control

Control without boundaries and get hands-free help to fully access the features of your air conditioners.

[FIND OUT MORE](#)

BZ super-compact · R32		
		2.50 kW
Kit		KIT-BZ25-XKE
Cooling capacity (Nominal)	kW	2,50
Cooling capacity (Min)	kW	0,85
Cooling capacity (Max)	kW	3,00
EER (Nominal) (1)	W/W	3,68
EER (Min) (1)	W/W	4,05
EER (Max) (1)	W/W	3,33
SEER (2)		6,20 A++
Pdesign (cooling)	kW	2,50
Input power cooling (Nominal)	kW	0,68
Input power cooling (Min)	kW	0,21
Input power cooling (Max)	kW	0,90
Annual energy consumption cooling (3)	kWh/a	141
Heating capacity (Nominal)	kW	3,15
Heating capacity (Min)	kW	0,80
Heating capacity (Max)	kW	3,60
Heating capacity at -7°C	kW	2,14
COP (Nominal) (1)	W/W	4,06
COP (Min) (1)	W/W	4,21
COP (Max) (1)	W/W	3,46
SCOP (2)		4,20 A+
Pdesign at -10°C	kW	1,90
Input power heating (Nominal)	kW	0,78
Input power heating (Min)	kW	0,19
Input power heating (Max)	kW	1,04
Annual energy consumption heating (3)	kWh/a	633
Indoor unit		CS-BZ25XKE
Indoor power source	V	230
Indoor recommended fuse	A	16
Indoor connection indoor / outdoor	mm ²	4 x 1,5
Indoor air flow (Cool)	m ³ /min	10,5
Indoor air flow (Heat)	m ³ /min	11,1
Moisture removal volume	L/h	1,5
Indoor sound pressure (Cool -Hi) (4)	dB(A)	37
Indoor sound pressure (Cool -Hi) (4)	dB(A)	37
Indoor sound pressure (Cool -Lo) (4)	dB(A)	26
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	20
Indoor sound pressure (Heat -Hi) (4)	dB(A)	37
Indoor sound pressure (Heat -Lo) (4)	dB(A)	27
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	24
Indoor dimension (Height)	mm	290
Indoor dimension (Width)	mm	779
Indoor dimension (Depth)	mm	209
Indoor net weight	kg	8
Outdoor unit		CU-BZ25XKE
Outdoor air flow (Cool)	m ³ /min	30,4
Outdoor air flow (Heat)	m ³ /min	30,4
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48

BZ super-compact • R32		2.50 kW
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	49
Outdoor dimension (Height) (5)	mm	542
Outdoor dimension (Width) (5)	mm	780
Outdoor dimension (Depth) (5)	mm	289
Outdoor net weight	kg	24
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 15
Elevation difference (in/out) (6)	m	15
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	10
Refrigerant (R32) / CO2 Eq.	kg / T	0,54 / 0,36
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Max)	°C	+43
Operating range (Heat - Min)	°C	-15
Operating range (Heat - Max)	°C	+24

Complementary products

